


thermal trend

QUALITY THROUGH INNOVATION

Termostat X2

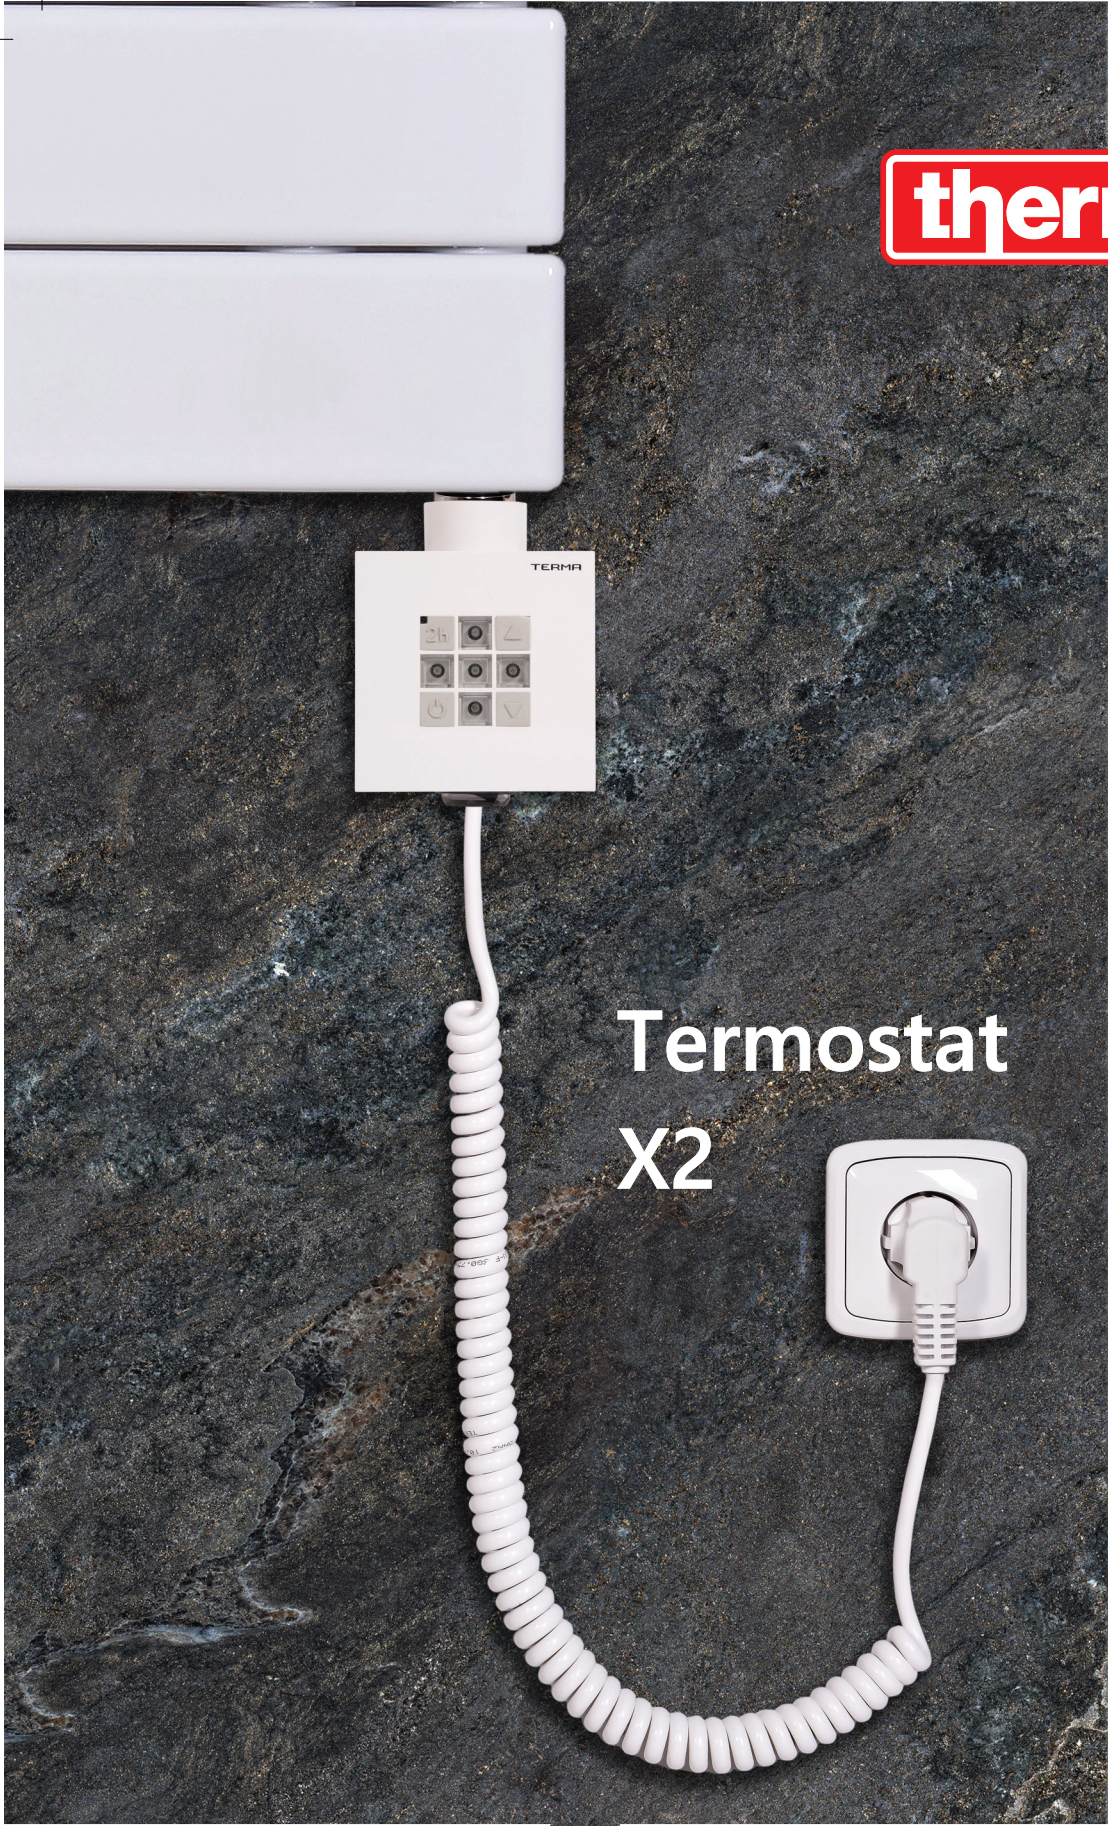

Termostat X2

HEATING ELEMENT KTX 2

Functional & ergonomic

Functional & ergonomic KTX 2 is a funky yet functional heating element controller equipped with 5-step medium heating temperature regulation within 30÷60°C. A 2-hour timer gives you the comfort of not having to worry about turning the controller off. This is convenient, especially when drying clothes. Another advantage of this device is the Anti-Freeze function which protects the heating medium from freezing.

FUNCTIONALITY This KTX 2 has a five step temperature control which ranges from 30°C to 60°C. An electronic temperature sensor ensures precise temperature control. The device displays its current temperature setting. The KTX 2 is designed for use with the TS 1 heating element. The unique feature of the KTX range of heating elements is the Terma Split System. The TermaSplit connector makes it possible to disconnect the TS 1 from the controller head.

TIMER The KTX 2 heating element has a 2-hour timer with two working modes. One mode is used while the KTX 2 is active and heating. In this mode the KTX 2 will maintain the previously set temperature and then switch itself off after 2 hours. The second mode can be used to turn the KTX 2 on (when previously off) for a period of 2 hours, following these 2 hours the KTX 2 will turn off.

INTELLIGENT BUILDING SYSTEMS The KTX 2 remembers its previous settings even when the power supply is lost. It is therefore suitable to be used with external timers or intelligent building systems.

SAFETY The KTX 2 is equipped with 'frost' protection (ANTIFREEZE). It has a double protection against overheating of the radiator and displays a warning in case of malfunction.

DESIGN The KTX 2 heating element has The KTX 2 heating element has an easy to use interface. A version with a cablemasking cover, additional power on/off switch and screw connection is also available.

INGRESS PROTECTION (IP) Ipx4: MS version (screw terminals); IPx5: version with cable.


L [mm]	325	285	310	345	375	485	575
Power [W]	120	200	300	400	600	800	1000

thermal trend


Starovičky 271
693 01 Hustopeče u Brna
Czech Republic
Tel: +420 519 414 032; +420 602 745 290
thermal-trend@thermal-trend.cz




www.thermal-trend.cz

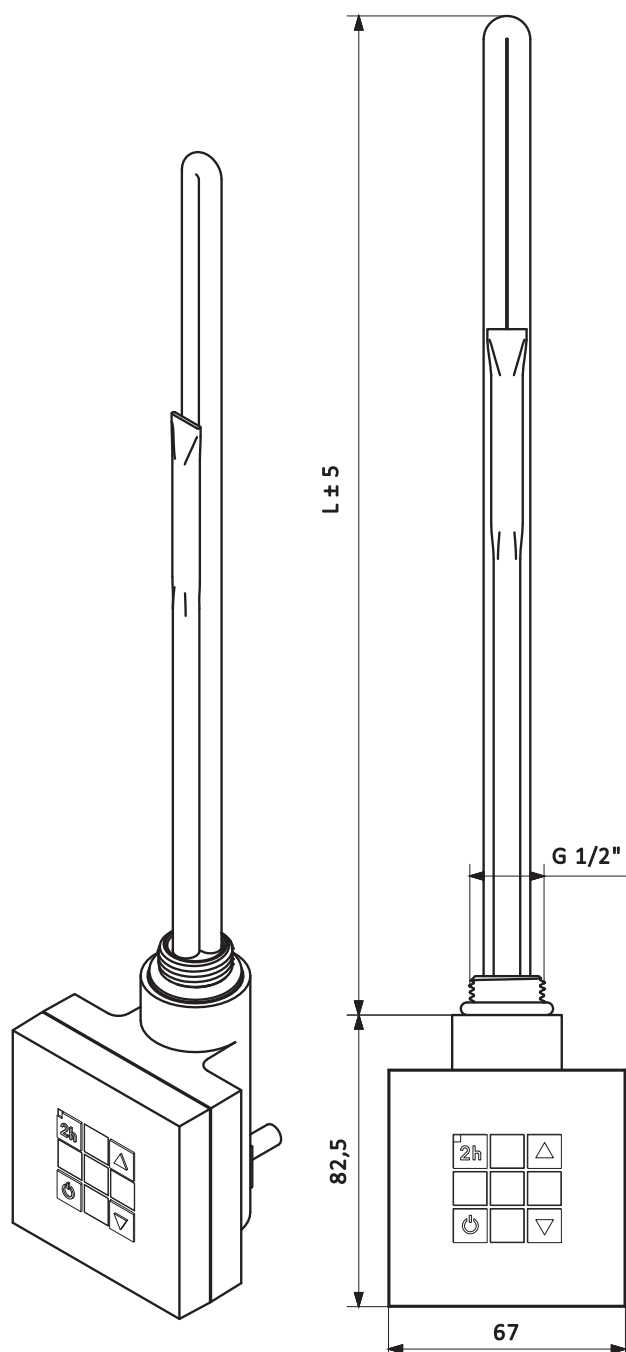


Straight cable with plug. Cable length: 1,5 m



Straight cable without plug



Spiral cable with plug. Cable length: 1,5 m

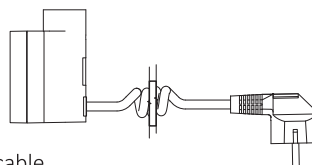

no power cable
(screw terminals with masking cover)

