


thermal trend

QUALITY THROUGH INNOVATION

Termostat X4

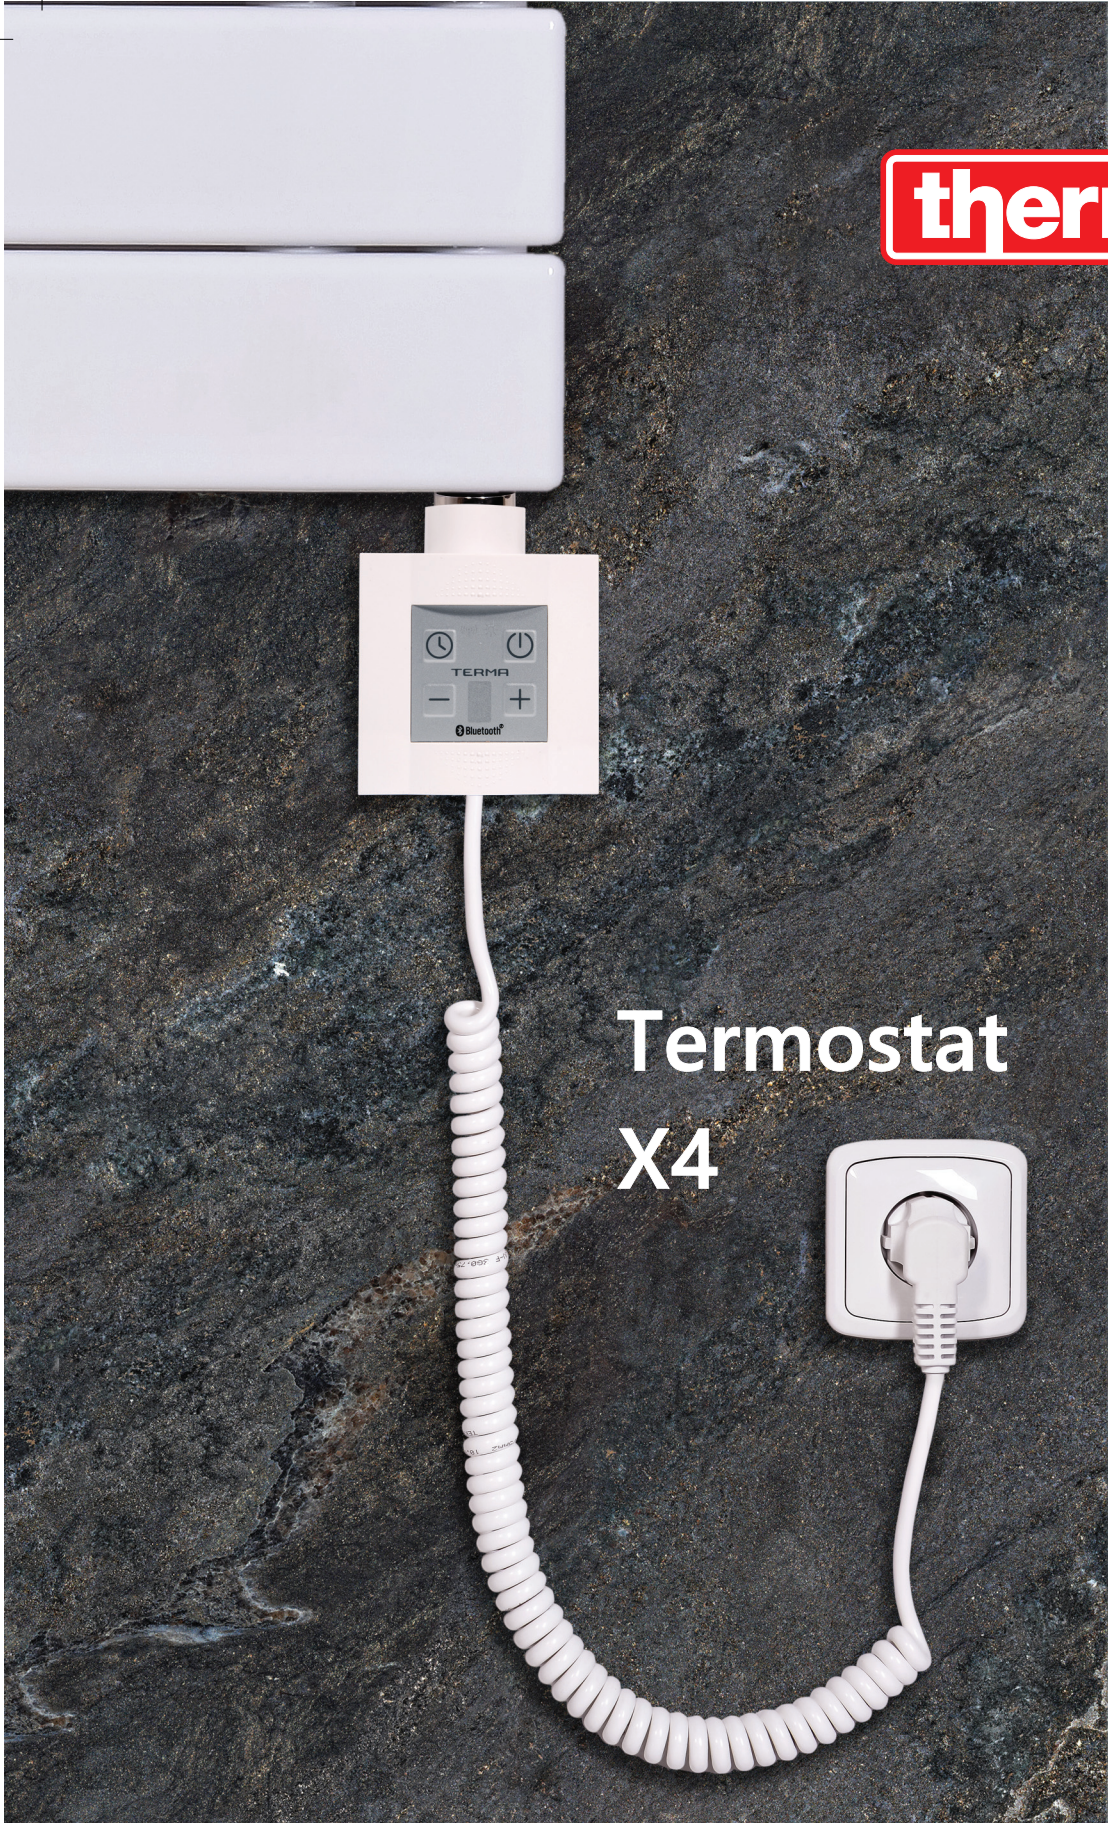

Termostat X4

HEATING ELEMENT KTX 4 BLUE

The KTX4 Blue has all the features of the original KTX4 heater. Remote control is based on Bluetooth® wireless technology. Any smartphone or tablet with the installed TERMA Blue control application can be used as an external programmer for the heater. Thanks to the control application, the user has a great opportunity to create schedules for the KTX4 Blue heater. TERMA Blue is available for free in the Google Play Store and AppStore*.

FUNCTIONALITY

Full functionality of the heater is available through the BLUE-Line control application. One can control the radiator temperature (30-60 °C) and program any number of 7-day schedules and advanced timer. The buttons on the housing allow you to set the operating temperature or run a simplified Timer (up to 4 hours). The device shows the currently set temperature level and indicates the state of heating and cooling. The heater was designed in the Term-Split System, which allows the heater and the controller to be disconnected. The KTX 4 also has a real time heating counter, which allows you to better control the amount of energy consumed.

REMOTE CONTROL

Any portable device - smartphone or tablet - with Bluetooth® technology can be used to remotely control. BLUE-Line control application for Android and iOS is available in online stores*. With one device, we can program and control any number of BLUE devices (heater and heater) within range of the mobile device.

SAFETY


The KTX 4 is equipped with a ‘frost’ protection (ANTIFREEZE). It also has double protection against the element overheating as well as a safety feature that prevents damage in case of operation in a dry radiator. A device error or malfunction is identified by a display of error codes.

DESIGN


Equipped with an easy to read single digit LED display in blue.

INGRESS PROTECTION (IP)


Ipx5

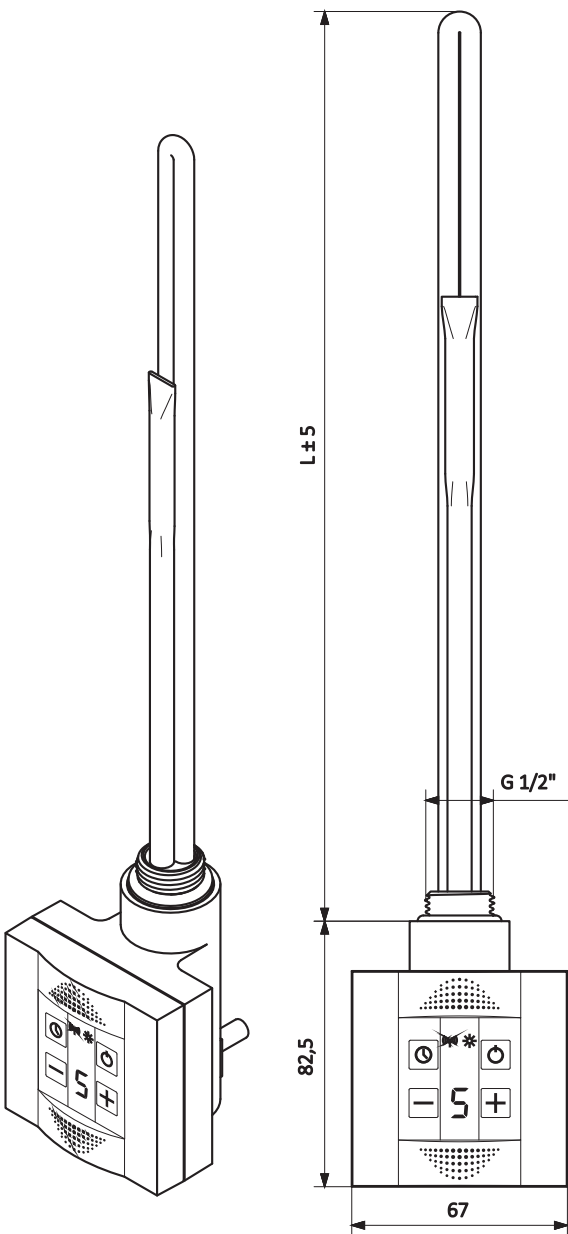



Straight cable with plug. Cable length: 1,5 m

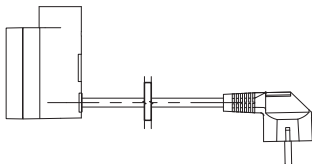

Straight cable without plug



Spiral cable with plug. Cable length: 1,5 m

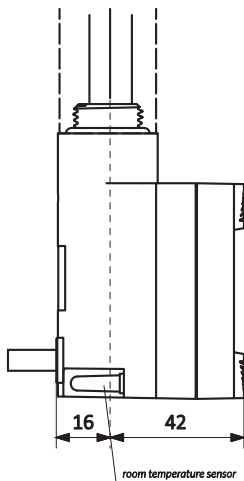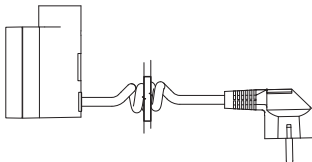

thermal trend

Starovičky 271
693 01 Hustopeče u Brna
Czech Republic
Tel: +420 519 414 032; +420 602 745 290
thermal-trend@thermal-trend.cz



www.thermal-trend.cz

L [mm]	325	285	310	345	375	485	575
Power [w]	120	200	300	400	600	800	1000